


# RainPAVE™




# StormPAVE™

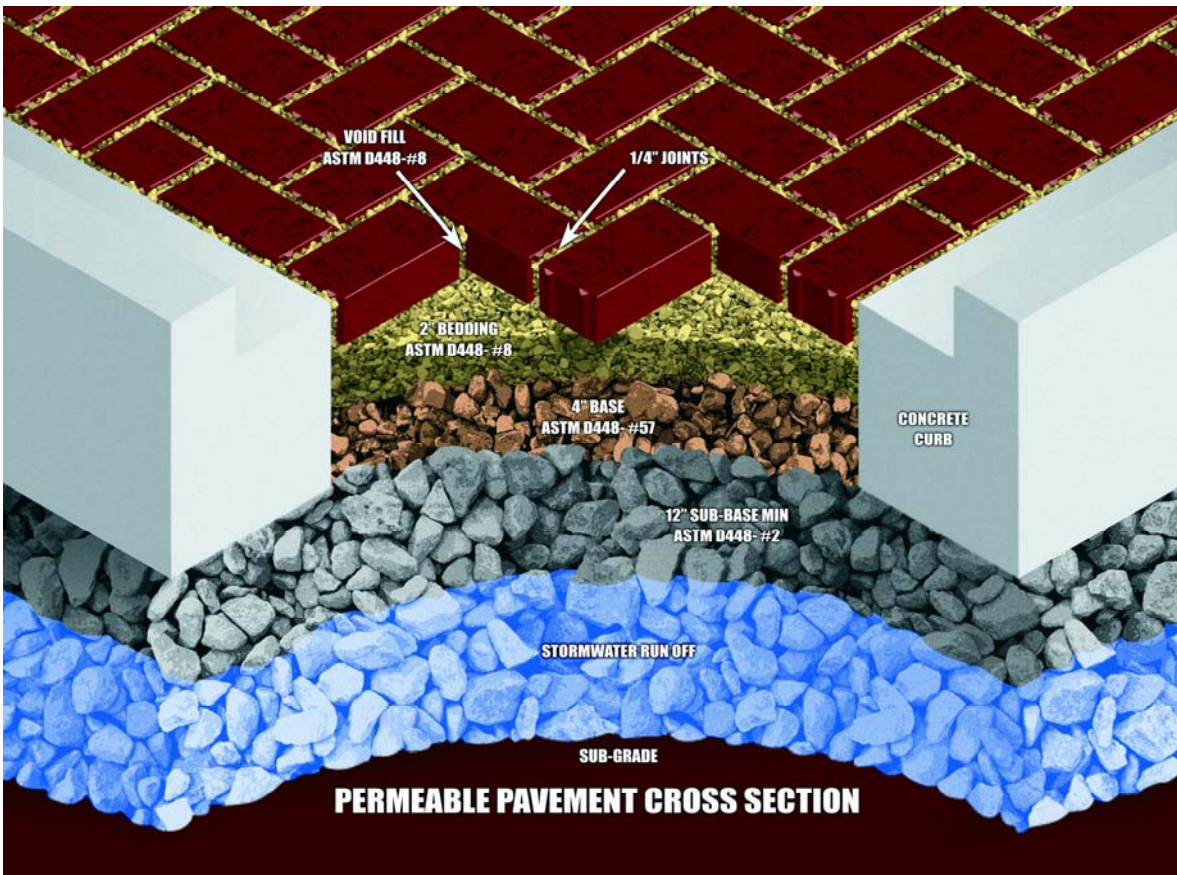

- The environmental choice to preserve natural water drainage through a classic segmental pavement.
- Perfect system where impervious surface restrictions exist or where onsite retention/infiltration is mandated.
- High infiltration rate when installed in a “best practice” permeable pavement system: 50”/hour (based on 8.5% void area).
- System may qualify for LEED Credit 6 Sustainable Site-Stormwater Design.
- StormPave—Maximum void opening less than 1/2” - ADA Compliant.
- RainPave—Historic look and size for residential driveways.
- Genuine Clay Paver—Strong Durable and Colorfast.
- Permeable Pavement System should be designed in consultation with qualified engineer.


PHB-PV32

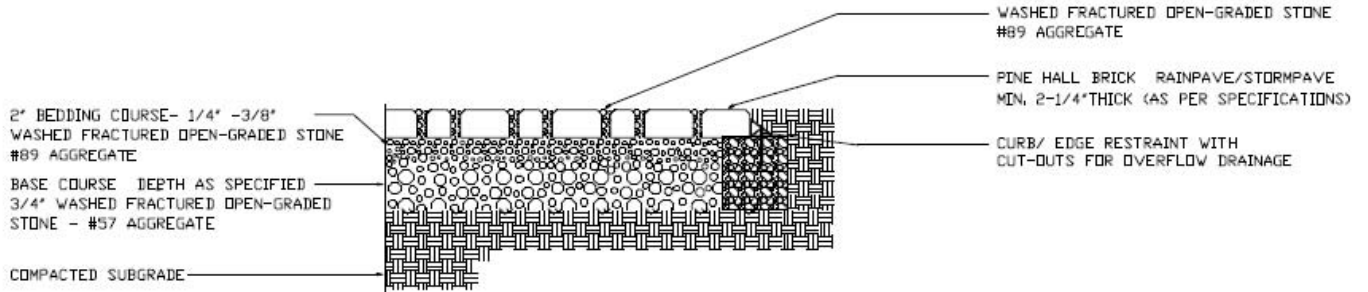

 PERMEABLE PAVEMENT-RESIDENTIAL INSTALLATION

NTS

PHB-PV33

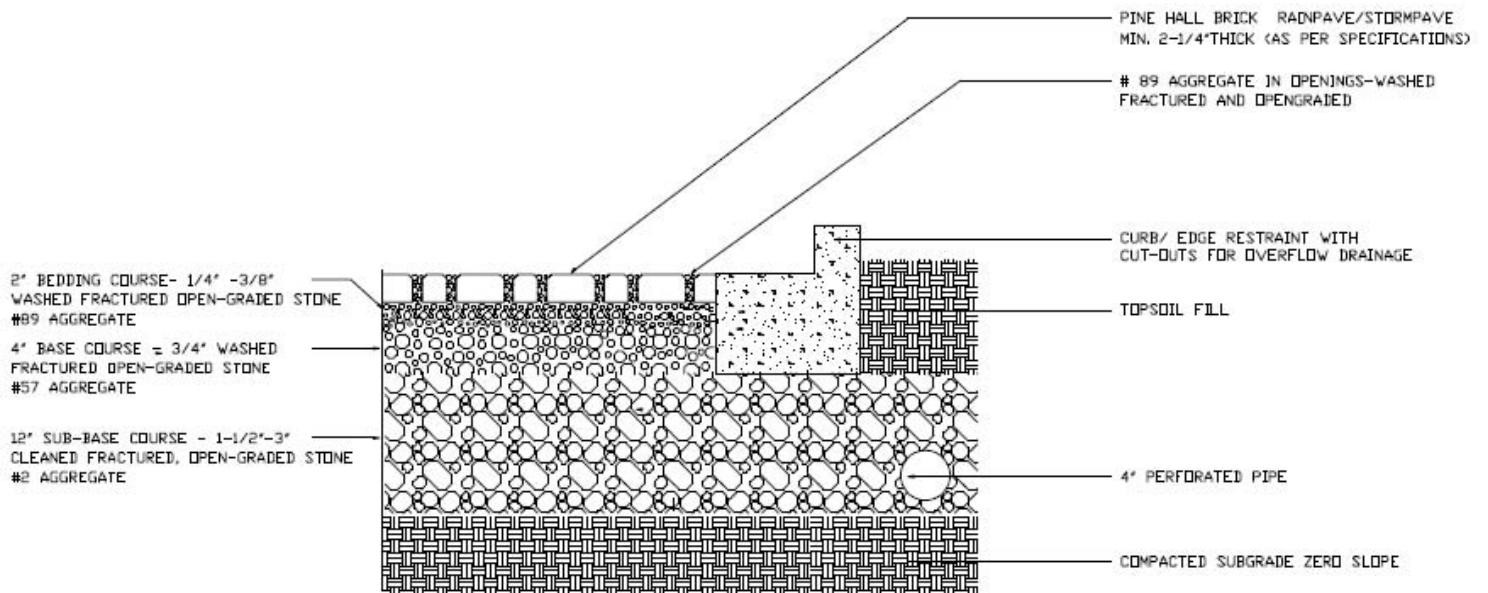

 PERMEABLE PAVEMENT-COMMERCIAL INSTALLATION

NTS